

SANTA ROSA MEMORIAL HOSPICE HOUSE  
PLANNING SUBMITTAL  
PROPOSED PRELIMINARY LIGHT FIXTURE CUTSHEETS  
Updated: NOV. 16, 2020

The Strut LED bollard exemplifies the epitome of a modern, minimalist aesthetic. The clean lines and modern design can effortlessly disappear into the setting or be positioned to make a bold statement. A singular line of LED down light with controlled Type II distribution is ideal for outdoor path and campus illumination.

**High quality LM80-tested LEDs**  
for consistent long-life performance and color

**Outstanding protection against the elements:**

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

**Type II asymmetric light distribution**

## SPECIFICATIONS

DELIVERED LUMENS	1312
WATTS	19.3
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
SECONDARY SURGE PROTECTOR	10kA
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Type II
MOUNTING OPTIONS**	Bolt
PERFORMANCE OPTIONS	Photocontrol / In-Line Fuse
CCT	2700K, 3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U1-G1
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	7.5 lbs.


\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.

\*\*Bollard base not suitable for branch circuit through wiring.

## ORDERING INFORMATION

700OBSTR	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	827 80 CRI, 2700K	42 42"	C FLAT CLEAR	B BLACK	UNV 120V-277V	2 TYPE 2 DISTRIBUTION	NONE
	830 80 CRI, 3000K			Z BRONZE			PC BUTTON PHOTOCONTROL*
	840 80 CRI, 4000K			H CHARCOAL			LF IN-LINE FUSE*
							PCLF BUTTON PHOTOCONTROL & IN-LINE FUSE*

\*FOR USE ONLY IN 120V-277V VERSION.

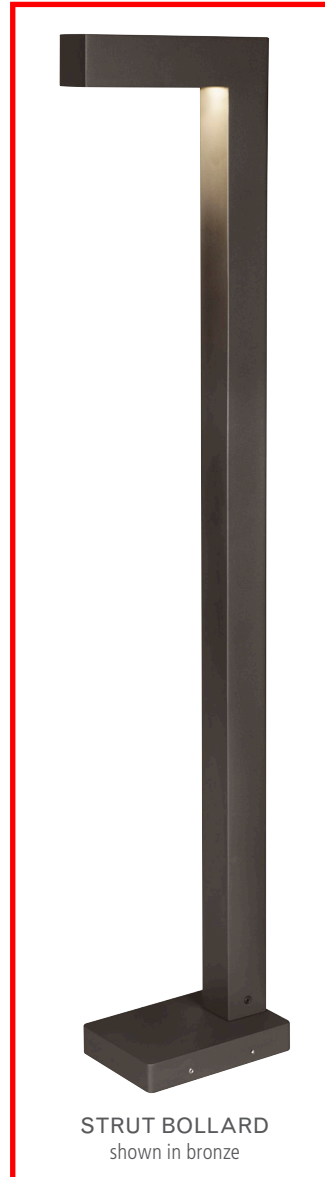

# PITCH SINGLE WALL SCONCE



An architectural profile reminiscent of beautifully classic roof lines delivers significant light output in this modern LED wall sconce suitable for both indoor and outdoor applications. The Pitch Single's die-cast metal body houses powerful LED light sources that create visual appeal as light cascades down along a wall.

**High quality LM80-tested LEDs**  
for consistent long-life performance and color

**Outstanding protection against the elements:**


- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

**Can be mounted for up lighting or down lighting**


## SPECIFICATIONS

DELIVERED LUMENS	823
WATTS	26.1
VOLTAGE	120V, 277V
DIMMING	ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Downlight or Uplight
CCT	2700K, 3000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B1-U0-G0
DARK SKY	Compliant (Downlight)
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	No
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	1.2 lbs.


\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.




PITCH SINGLE  
shown in black



PITCH SINGLE  
shown in bronze



PITCH SINGLE  
shown in charcoal



PITCH SINGLE  
shown in silver

## ORDERING INFORMATION

700WSPIT	SIZE	FINISH	LAMP
	S SINGLE	B BLACK	-LED827 LED 80 CRI, 2700K 120V
		Z BRONZE	-LED827Z77 LED 80 CRI, 2700K 277V
		H CHARCOAL	-LED830 LED 80 CRI, 3000K 120V
		I SILVER	-LED830Z77 LED 80 CRI, 3000K 277V

# LED

## Ceiling Mount Canopy Light

### Ideal For

Outdoor Light

### Features

- Bronze Finish
- Non-Dimmable
- Uniform Light Distribution
- Maintenance Free
- Modern, Low-Profile Design
- Energy Star®
- 5 Year Warranty



### Specifications


Item Number	Input Power (Watts)	Dimensions	Input Line Voltage
S13CM/850/BZ	18.5	13"d x 2.15"h	120V
Life Hours	Lumens	Lumen Efficiency (LPW)	CCT
50,000	1300	70	5000K

## CEILING MOUNT CANOPY LIGHT INSTALLATION INSTRUCTIONS

**WARNING:** These products may represent a possible shock or fire hazard if improperly installed or attached in any way. Products should be installed in accordance with the owners manual, current electrical codes and/or the current National Electric Code (NEC).

### PARTS INCLUDED

- (1) Canopy light
- (2) J-Box mounting screws
- (2) Wire nuts
- (4) Cover screws

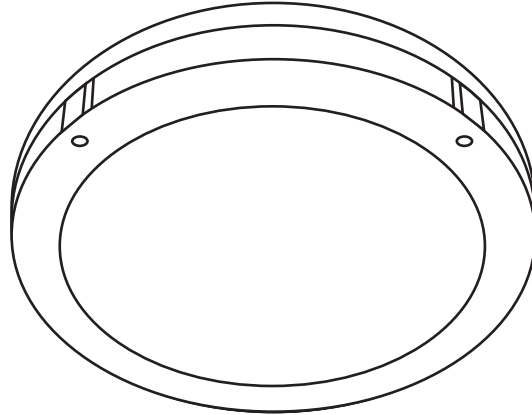


**CAUTION, IMPORTANT SAFETY INSTRUCTIONS** - Make sure the supply voltage is the same as the rated luminaire voltage. Do not install where marked operating temperatures exceed the ignition temperature of the hazardous atmosphere. Do not operate in ambient temperatures above those indicated on the luminaire nameplate. To avoid the risk of fire, explosion, or electric shock, this product should be installed, inspected and maintained by a qualified electrician only, in accordance with all applicable electrical codes. Be certain electrical power is OFF before and during installation and maintenance.

**Note:** Save these instructions for future reference.

For supply connections use wire rated for at least 90°C

**CAUTION:** Input 120VAC

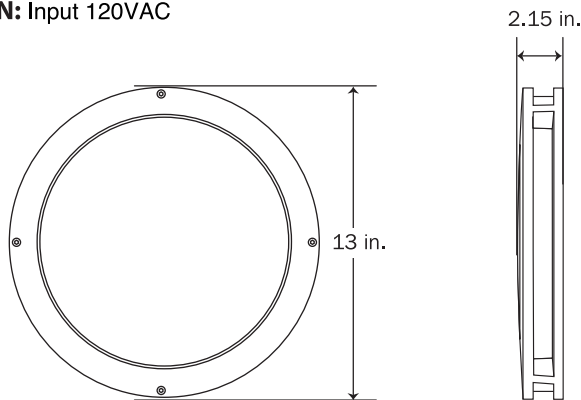

### LIMITED WARRANTY

This product is warranted to be free from defects in workmanship and materials for up to 5 years from date of purchase. If it fails to do so, please contact Feit Electric at [info@feit.com](mailto:info@feit.com) or call 1-866 326-BULB (2852) for instructions on replacement. Do not return the product to the store.

For comments please write to:  
Feit Electric  
Customer Service Department  
4901 Gregg Road, Pico Rivera, CA 90660

LIGHTING DISTRIBUTION		
DISTANCE	CENTER BEAM (FOOT CANDLES)	BEAM DIAMETER
3 FT.	49	9.2 FT.
5 FT.	18	15 FT.
8 FT.	6.9	25 FT.
15 FT.	2.0	46 FT.
BEAM ANGLE = 114°		

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the

instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help.